




■ Specifications

OT 18-12		
Nominal Voltage	12V	
Rated Capacity (20 hours rate)	18Ah	
Dimension (±2mm)	Total Height (with terminals)	167mm
	Length	181mm
	Width	77mm
	Height	167mm
Weight (Approx)	4.88Kg	


■ Characteristics

Capacity (25°C)	20 hours rate	(0.85A)	18.0Ah
Discharge Current Testing (25°C)	20 I ₂₀ rate	(18A, 27min)	40min
	60 I ₂₀ rate	(54A, 7min)	9.5min
Internal Resistance	Full Charged Battery 25°C		16mΩ
Capacity Affected By Temperature (20 hours rate)	40°C		102%
	25°C		100%
	0°C		85%
	-15°C		62%
Residual Capacity (25°C)	Capacity After 3 Months Storage		91%
	Capacity After 6 Months Storage		82%
	Capacity After 12 Months Storage		64%
Cycle (Above 300 Time)	Discharge 2hrs at 4.25A Current Charge 6hrs at 1.8A Current (25°C)		
Charge (Constant Voltage)	Cycle (25°C)	Initial Charging Current Less Than 5.4A; Voltage 14.5~14.9V	
	Float (25°C)	Charge Voltage 13.6~13.8V	

★ The above are average and data obtained from the first 3 charge/discharge cycles. These are not minimum values.

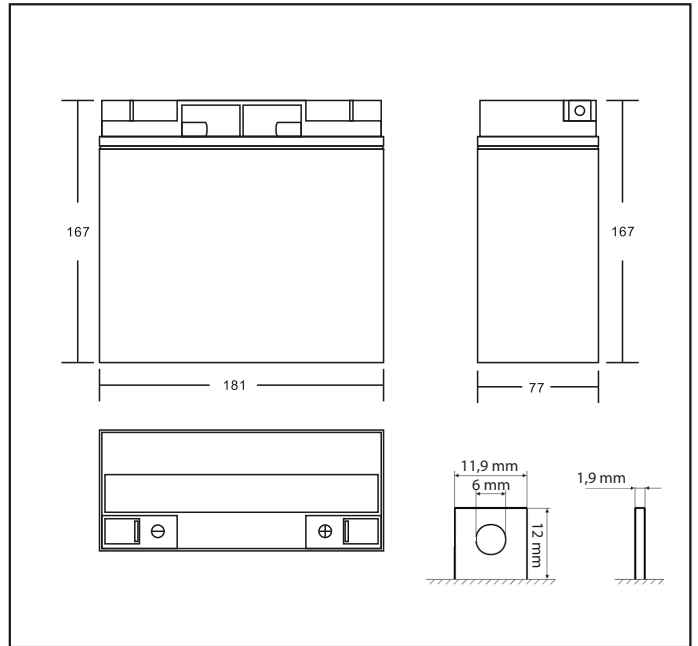

■ Discharge Current & Duration Time

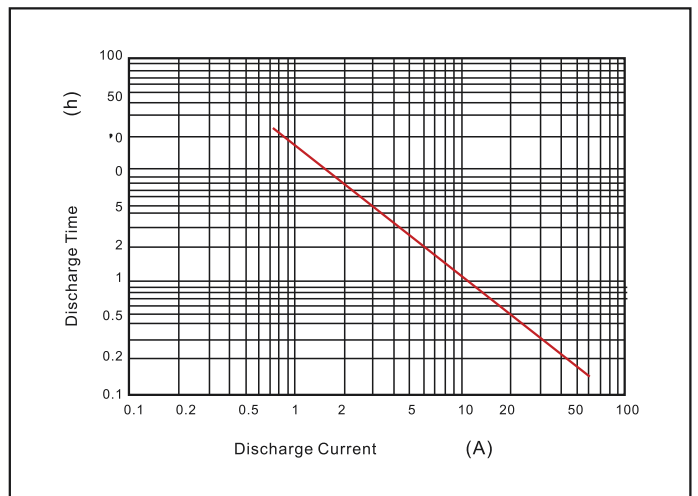

■ Discharge Current 25°C

