



LED Panel 40W (4x18W*) 3600lm 120° IP20 natural light 4000K

General characteristics

Family name	HPB4060
Luminaire type	LED Panel
Installation options	Recessed, surface mounted, suspended
Intelligent control	No
Certificates	CE, RoHS
Warranty	2 years

Operating characteristic

Lifetime	35 000h
Switching cycle	> 20 000
LLMF	0,7
IP	20
Warm up time	negligible
Starting time	< 0,5s
Working temperature	from -20° to 40°C
Storage temperature	from -20° to 40°C

Electrical characteristic

Wattage	40W
Replaces*	4x18W
Voltage	185-265V
Voltage frequency	AC
Power factor	> 0,9
Energy efficiency label	A+

Light technical characteristic

Luminaire luminous flux	3600lm
Luminous efficacy	90lm/W
Color temperature	4000K
Light color	neutral
CRI	> 80
Beam angle	120°
Color consistency	< 6SDMC


Mechanical characteristic

Light source dimensions	595x595x24mm
Packaging dimensions	L650xW607xH33mm
Weight net	1,4kg
Weight gross	1,7kg
Material	Aluminum, PS


Rated parameters

Rated power	40W
Rated luminous flux	3600lm
Rated lifetime	20 000h
Rated beam angle	120°


Technical drawing



Photometric solid

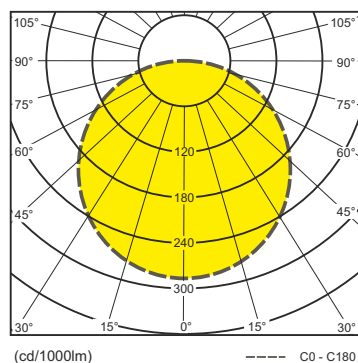

Spectrum

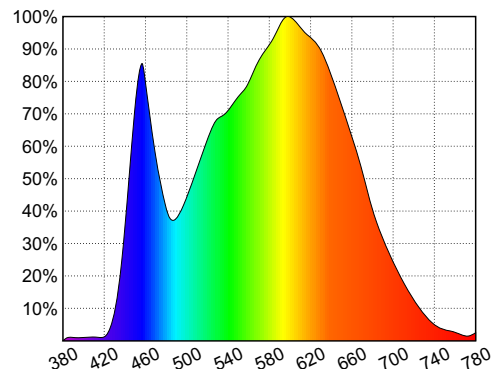

*wattage of luminaire with linear fluorescent lamp