

LED CANDLE COG






Power	1 W	Voltage	230 V
Luminous flux**	110 lm (360°)	Colour of light	NW
Beam angle	270 °	UGR	- lm
Socket	E14	Degree of protection (IP)	-



 Declaration of Conformity

Technical data:

Code	WOJ+14578
Power	1 W
Nominal current	10 mA
Voltage	230 V
Energy efficiency class	E
Energy consumption	1 kWh/1000h
Frequency	50HZ Hz
Power factor	0.4
Luminous flux*	110 lm (360°)
Luminous flux**	110 lm (360°)
Lamp efficacy	110 lm/W
Colour of light	NW
Beam angle	270 °
UGR	-
RA	>80
Dimmable	-
Working temperature range	-20 to +40 °
Lifespan	17000 h
Socket	E14
Degree of protection (IP)	-
Dimension (AxBxC)	35x99 mm
Weight	0.013 kg
For use	Inside
Number of pieces on the packaging	100 pcs.
Made in	PRC

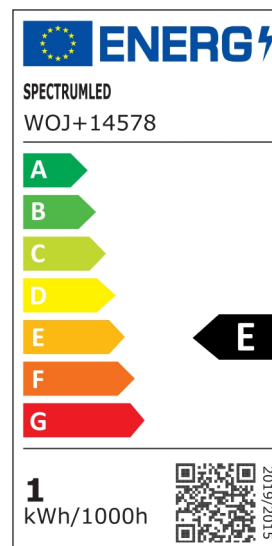

*applies to the LED source used. **Luminaire luminous flux