


LED MR16 12V 4W SMD NW WITH MILKY COVER SPECTRUM




Power	4 W	Voltage	12 V
Luminous flux**	415 lm (360°)	Colour of light	NW
Beam angle	100 °	UGR	- lm
Socket	GU5,3	Degree of protection (IP)	-



 Declaration of Conformity

Technical data:

Code	WOJ+14549
Power	4 W
Nominal current	530 mA
Voltage	12 V
Energy efficiency class	F
Energy consumption	4 kWh/1000h
Frequency	50HZ Hz
Luminous flux*	350 lm (120°)
Luminous flux**	415 lm (360°)
Lamp efficacy	104 lm/W
Luminous intensity	150 cd
Colour of light	NW
Beam angle	100 °
UGR	-
RA	>80
Dimmable	No
Working temperature range	-20 to +40 °
Lifespan	17000 h
Socket	GU5,3
Degree of protection (IP)	-
Dimension (AxBxC)	50X50 mm
For use	Inside
Made in	PRC

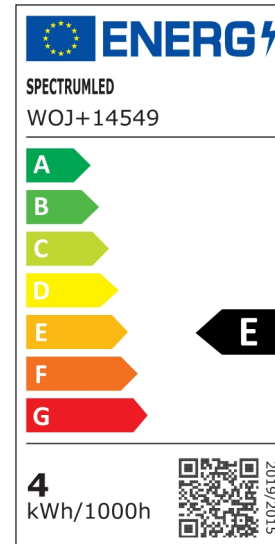

*applies to the LED source used. **Luminaire luminous flux